




Lanyard - Loop to Rectangular Tab

tab and crimps stainless steel



Other Pins

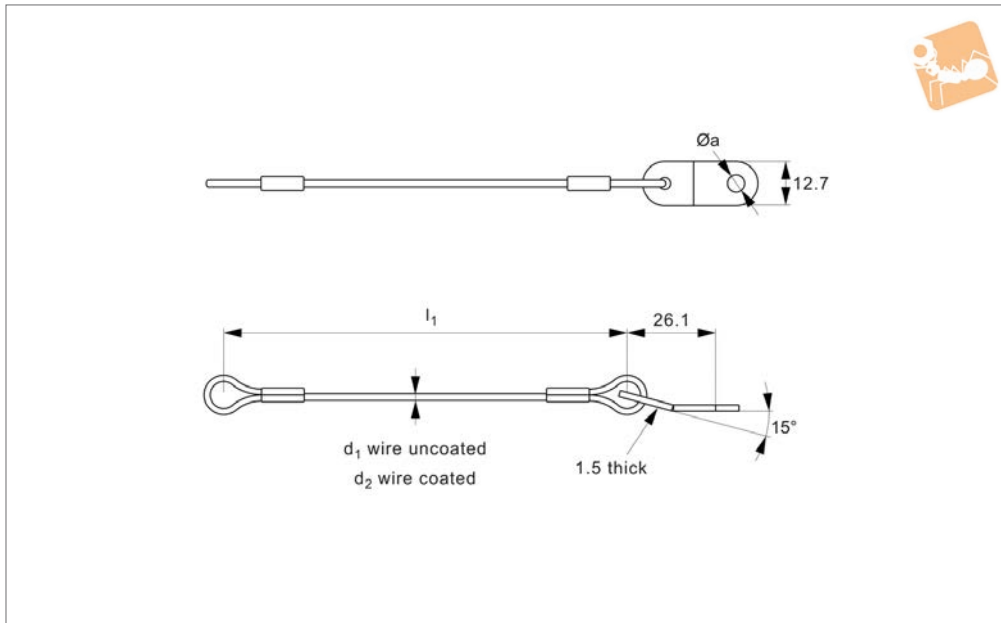

P1254

OTHER PINS

Material

Material

Wire rope: stainless steel 7x7 wire, RR-W-410.

Coating (if present): vinyl (to MIL-I-631), see table.

Crimps/sleeves: stainless steel (to MIL-51844).

Tabs: stainless steel, 300 Series (ASTM AA240/A666)

Technical Notes

Rated wire strength, or min. breaking

strength, for unassembled, uncoated wire thickness $\text{Ø}d_1$:

$\text{Ø}d_1$ of 1.2mm = 120kg approx.

$\text{Ø}d_1$ of 1.6mm = 210kg approx.

Load rating of assembled and crimped lanyard is based on crimp failure test of approx. 13kg.

Temperature resistance:

-Uncoated – up to + 250°c

-Coated – 0°c to 80°c

lies, or to avoid items being misplaced.

Special manufacture lanyards available on request, subject to minimum quantities.

For our wide range of quick release pins see part nos. through QR5590. For split rings see part no. .

Tips

For use in securing components to assemb-

Order No.	Vinyl coating	d_1 wire uncoated	l_1	d_2 wire coated	$\text{Ø} a$
P1254.150-C1	Clear	1.19	154.4	1.59	5.1
P1254.200-C1	Clear	1.19	203.2	1.59	5.1
P1254.250-C1	Clear	1.19	254.0	1.59	5.1
P1254.300-C1	Clear	1.19	304.8	1.59	5.1
P1254.150-C2	Clear	1.19	152.4	1.59	7.1
P1254.200-C2	Clear	1.59	203.2	3.18	7.1
P1254.250-C2	Clear	1.59	254.0	3.18	7.1
P1254.300-C2	Clear	1.59	304.8	3.18	7.1
P1254.150-B1	Black	1.19	152.4	1.59	5.1
P1254.200-B1	Black	1.19	203.2	1.59	5.1
P1254.250-B1	Black	1.19	254.0	1.59	5.1
P1254.300-B1	Black	1.19	304.8	1.59	5.1
P1254.150-B2	Black	1.59	152.4	3.18	7.1
P1254.200-B2	Black	1.59	203.2	3.18	7.1
P1254.250-B2	Black	1.59	254.0	3.18	7.1
P1254.150-G1	Green	1.19	152.4	1.59	5.1
P1254.200-G1	Green	1.19	203.2	1.59	5.1
P1254.250-G1	Green	1.19	254.0	1.59	5.1
P1254.300-G1	Green	1.19	304.8	1.59	5.1
P1254.150-G2	Green	1.59	152.4	3.18	7.1
P1254.200-G2	Green	1.59	203.2	3.18	7.1
P1254.250-G2	Green	1.59	254.0	3.18	7.1
P1254.300-G2	Green	1.59	304.8	3.18	7.1
P1254.150-N1	Uncoated	1.19	152.4	-	5.1
P1254.200-N1	Uncoated	1.19	203.2	-	5.1




Order No.	Vinyl coating	d ₁ wire uncoated	l ₁	d ₂ wire coated	Ø a
P1254.250-N1	Uncoated	1.19	254.0	-	5.1
P1254.300-N1	Uncoated	1.19	304.8	-	5.1
P1254.150-N2	Uncoated	1.59	152.4	-	7.1
P1254.200-N2	Uncoated	1.59	203.2	-	7.1
P1254.300-N2	Uncoated	1.59	304.8	-	7.1

Lanyard - Loop to Loop

crimps stainless steel

Other Pins

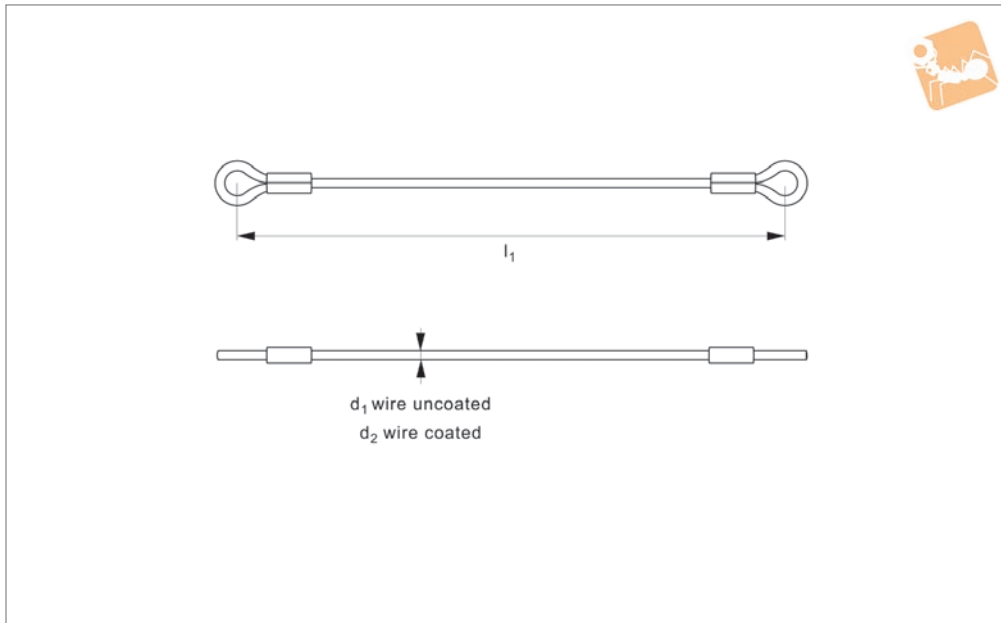

P1255

OTHER PINS

Material

Wire rope: stainless steel 7x7 wire, RR-W-410.

Coating (if present): vinyl (to MIL-I-631), see table.

Crimps/sleeves: stainless steel (to MIL-51844).

Technical Notes

Rated wire strength, or min. breaking

strength, for unassembled, uncoated wire thickness $\varnothing d_1$:

$\varnothing d_1$ of 1.2mm = 120kg approx.

$\varnothing d_1$ of 1.6mm = 210kg approx.

Load rating of assembled and crimped lanyard is based on crimp failure test of approx. 13kg.

Temperature resistance:

-Uncoated – up to + 250°C

-Coated – 0°C to 80°C

Tips

For use in securing components to assemblies, or to avoid items being misplaced. Special manufacture lanyards available on request, subject to minimum quantities. For our wide range of quick release pins see part nos. through QR5590. For split rings see part no. .

Order No.	Vinyl coating	d_1 wire uncoated	l_1	d_2 wire coated
P1255.150-C1	Clear	1.19	152.4	1.59
P1255.200-C1	Clear	1.19	203.2	1.59
P1255.250-C1	Clear	1.19	254.0	1.59
P1255.300-C1	Clear	1.19	304.8	1.59
P1255.150-C2	Clear	1.59	152.4	3.18
P1255.200-C2	Clear	1.59	203.2	3.18
P1255.250-C2	Clear	1.59	254.0	3.18
P1255.300-C2	Clear	1.59	304.8	3.18
P1255.150-B1	Black	1.19	152.4	1.59
P1255.200-B1	Black	1.19	203.2	1.59
P1255.250-B1	Black	1.19	254.0	1.59
P1255.300-B1	Black	1.19	304.8	1.59
P1255.150-B2	Black	1.59	152.4	3.18
P1255.200-B2	Black	1.59	203.2	3.18
P1255.250-B2	Black	1.59	254.0	3.18
P1255.150-G1	Green	1.19	152.4	1.59
P1255.200-G1	Green	1.19	203.2	1.59
P1255.250-G1	Green	1.19	254.0	1.59
P1255.300-G1	Green	1.19	304.8	1.59
P1255.150-G2	Green	1.59	152.4	3.18
P1255.200-G2	Green	1.59	203.2	3.18
P1255.250-G2	Green	1.59	254.0	3.18
P1255.300-G2	Green	1.59	304.8	3.18
P1255.150-N1	Uncoated	1.19	152.4	-
P1255.200-N1	Uncoated	1.19	203.2	-
P1255.250-N1	Uncoated	1.19	254.0	-
P1255.300-N1	Uncoated	1.19	304.8	-
P1255.150-N2	Uncoated	1.59	152.4	-



Order No.	Vinyl coating	d ₁ wire uncoated	l ₁	d ₂ wire coated
P1255.200-N2	Uncoated	1.59	203.2	-
P1255.250-N2	Uncoated	1.59	254.0	-
P1255.300-N2	Uncoated	1.59	304.8	-