



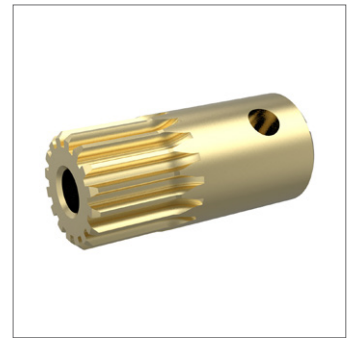

# Spur Gears - Module 0.3

brass - 14-18 teeth

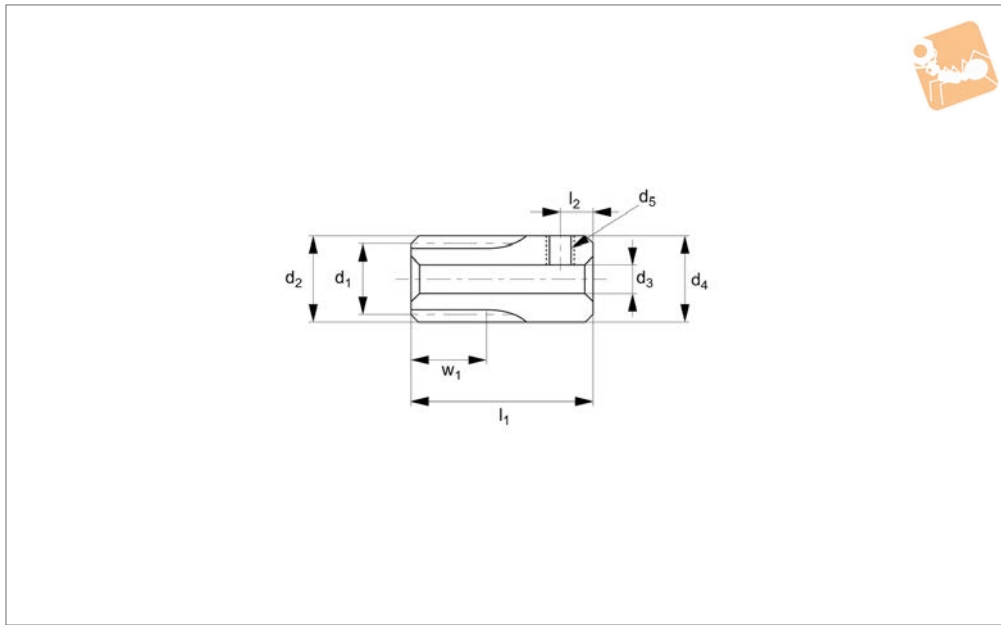

**R5100**

STANDARD SPUR GEARS

**Material**

Brass (C3604B).  
Accuracy to JIS B 1702-1 (ISO) class 9.

**Technical Notes**

20° pressure angle, full depth tooth.  
Amount of backlash when assembling


gears = 0,006 - 0,018 mm.

**Tips**


For module 0.3 brass gears with 20-120 teeth see R5101. Max. allowable torque (Nm) is based on standard operating conditions (see technical pages) with a

safety factor of 1.2. For non standard applications apply a suitable safety factor depending on frequency of use, type of working etc.

Order No.	Module	No. of teeth z	Pitch dia. d <sub>1</sub>	d <sub>2</sub>	w <sub>1</sub>	d <sub>3</sub> tol. H8	d <sub>4</sub>	l <sub>1</sub>	Thread d <sub>5</sub>	l <sub>2</sub>	Torque Nm max.	Weight g
R5100.030-014	m 0.3	14	4.2	4.8	4	2	5.0	12	M 1,6	2.5	0.031	1.5
R5100.030-015	m 0.3	15	4.5	5.1	4	2	5.5	12	M 1,6	2.5	0.034	1.8
R5100.030-016	m 0.3	16	4.8	5.4	4	2	5.5	12	M 1,6	2.5	0.038	1.9
R5100.030-018	m 0.3	18	5.4	6.0	4	2	6.0	12	M 2,0	2.5	0.046	2.3

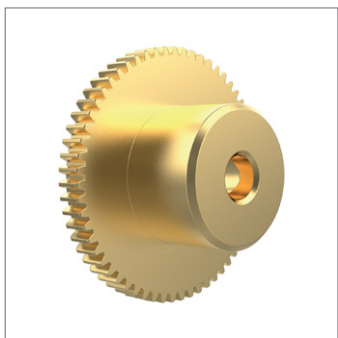

### R5101

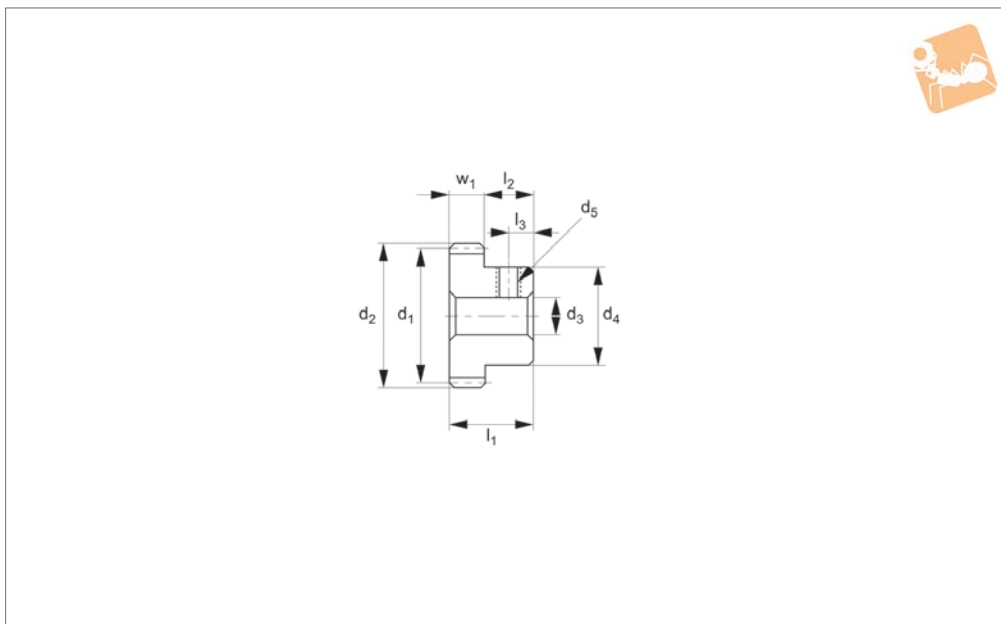

#### Material

Brass (C3604B). Accuracy to JIS B 1702-1 (ISO) class 9.

#### Technical Notes

20° pressure angle, full depth tooth.  
Amount of backlash when assembling

gears = 0,006 - 0,018mm.

#### Tips

For module 0.3 brass gears with 14-18 teeth see R5100. Max. allowable torque (Nm) is based on standard operating conditions (see technical pages) with a

safety factor of 1.2. For non standard applications apply a suitable safety factor depending on frequency of use, type of working etc.

Order No.	Module	No. of teeth z	Pitch dia. d <sub>1</sub>	d <sub>2</sub>	w <sub>1</sub>	d <sub>3</sub> tol. H8	d <sub>4</sub>	l <sub>1</sub>	Thread d <sub>5</sub>	l <sub>2</sub>	Torque Nm max.	l <sub>3</sub>	Weight g
R5101.030-020	m 0.3	20	6.0	6.6	3.2	2	5	8	M 1,6	4.8	0.043	2.5	1.3
R5101.030-024	m 0.3	24	7.2	7.8	3.2	2	6	8	M 2	4.8	0.055	2.5	2.0
R5101.030-025	m 0.3	25	7.5	8.1	3.2	2	6	8	M 2	4.8	0.059	2.5	2.1
R5101.030-028	m 0.3	28	8.4	9.0	3.2	2	7	8	M 4	4.8	0.069	2.5	2.8
R5101.030-030	m 0.3	30	9.0	9.6	3.2	2	8	8	M 2	4.8	0.075	2.5	3.5
R5101.030-032	m 0.3	32	9.6	10.2	2.0	2	8	8	M 2	6.0	0.052	2.5	3.5
R5101.030-035	m 0.3	35	10.5	11.1	2.0	2	8	8	M 2	6.0	0.058	3.0	3.8
R5101.030-036	m 0.3	36	10.8	11.4	2.0	3	9	8	M 3	6.0	0.060	3.0	4.2
R5101.030-040	m 0.3	40	12.0	12.6	2.0	3	10	8	M 3	6.0	0.069	3.0	5.3
R5101.030-045	m 0.3	45	13.5	14.1	2.0	3	10	8	M 3	6.0	0.080	3.0	5.8
R5101.030-048	m 0.3	48	14.4	15.0	2.0	3	10	8	M 3	6.0	0.087	3.0	6.1
R5101.030-050	m 0.3	50	15.0	15.6	2.0	3	10	8	M 3	6.0	0.092	3.0	6.4
R5101.030-056	m 0.3	56	16.8	17.4	2.0	3	10	8	M 3	6.0	0.105	3.0	7.1
R5101.030-060	m 0.3	60	18.0	18.6	2.0	3	10	8	M 3	6.0	0.115	3.0	7.7
R5101.030-064	m 0.3	64	19.2	19.8	2.0	3	10	8	M 3	6.0	0.123	3.0	8.3
R5101.030-066	m 0.3	66	19.8	20.4	2.0	3	10	8	M 3	6.0	0.128	3.0	8.6
R5101.030-070	m 0.3	70	21.0	21.6	2.0	3	10	8	M 3	6.0	0.137	3.0	9.3
R5101.030-072	m 0.3	72	21.6	22.2	2.0	3	10	8	M 3	6.0	0.141	3.0	9.6
R5101.030-075	m 0.3	75	22.5	23.1	2.0	3	10	8	M 3	6.0	0.149	3.0	10.1
R5101.030-080	m 0.3	80	24.0	24.6	2.0	3	10	8	M 3	6.0	0.160	3.0	11.1
R5101.030-090	m 0.3	90	27.0	27.6	2.0	3	10	8	M 3	6.0	0.183	3.0	13.1
R5101.030-096	m 0.3	96	28.8	29.4	2.0	3	10	8	M 3	6.0	0.197	3.0	14.4
R5101.030-100	m 0.3	100	30.0	30.6	2.0	3	10	8	M 3	6.0	0.206	3.0	15.4
R5101.030-108	m 0.3	108	32.4	33.0	2.0	3	10	8	M 3	6.0	0.225	3.0	17.4
R5101.030-120	m 0.3	120	36.0	36.6	2.0	3	10	8	M 3	6.0	0.253	3.0	20.7