




35mm Linear Guide Rail

rear fixing

Linear Guide-ways

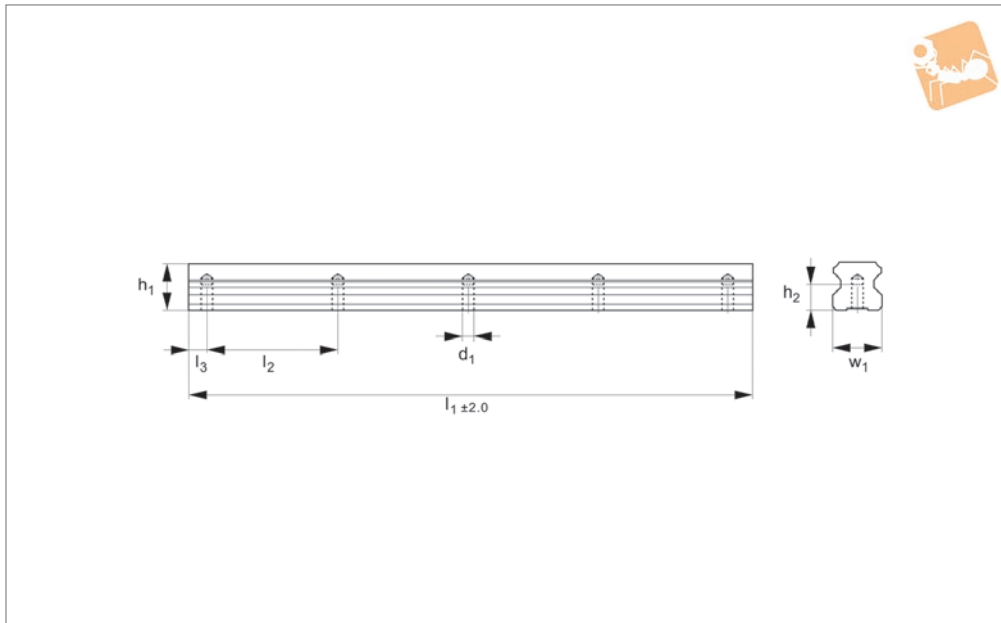

L1016.RF35

LINEAR GUIDEWAYS

Material

Hardened and ground steel (typically 60 HRC).

part nos. L1016.F (flanged) and L1016.U (unflanged).

Other rail lengths on request.

Weight: 7,2 Kg/m.

Technical Notes

For carriages to suit the required load see

Order No.	Rail size	l_1	h_1	l_2	w_1	l_3	h_2	d_1	Weight kg
L1016.RF35-0200	35	200	26.0	80	34	20	15	M8	1.44
L1016.RF35-0280	35	280	26.0	80	34	20	15	M8	2.02
L1016.RF35-0360	35	360	26.0	80	34	20	15	M8	2.59
L1016.RF35-0440	35	440	26.0	80	34	20	15	M8	3.17
L1016.RF35-0520	35	520	26.0	80	34	20	15	M8	3.74
L1016.RF35-0600	35	600	26.0	80	34	20	15	M8	4.32
L1016.RF35-0680	35	680	26.0	80	34	20	15	M8	4.90
L1016.RF35-0760	35	760	26.0	80	34	20	15	M8	5.47
L1016.RF35-0840	35	840	26.0	80	34	20	15	M8	6.05
L1016.RF35-0920	35	920	26.0	80	34	20	15	M8	6.62
L1016.RF35-1000	35	1000	26.0	80	34	20	15	M8	7.20
L1016.RF35-1080	35	1080	26.0	80	34	20	15	M8	7.78
L1016.RF35-1160	35	1160	26.0	80	34	20	15	M8	8.35
L1016.RF35-1240	35	1240	26.0	80	34	20	15	M8	8.93
L1016.RF35-1320	35	1320	26.0	80	34	20	15	M8	9.50
L1016.RF35-1400	35	1400	26.0	80	34	20	15	M8	10.08
L1016.RF35-1480	35	1480	26.0	80	34	20	15	M8	10.66
L1016.RF35-1560	35	1560	26.0	80	34	20	15	M8	11.23
L1016.RF35-1640	35	1640	26.0	80	34	20	15	M8	11.81
L1016.RF35-1720	35	1720	26.0	80	34	20	15	M8	12.38
L1016.RF35-1800	35	1800	26.0	80	34	20	15	M8	12.96
L1016.RF35-1880	35	1880	26.0	80	34	20	15	M8	13.54
L1016.RF35-1960	35	1960	26.0	80	34	20	15	M8	14.11
L1016.RF35-2040	35	2040	26.0	80	34	20	15	M8	14.69
L1016.RF35-2120	35	2120	26.0	80	34	20	15	M8	15.26
L1016.RF35-2200	35	2200	26.0	80	34	20	15	M8	15.84
L1016.RF35-2280	35	2280	26.0	80	34	20	15	M8	16.42
L1016.RF35-2360	35	2360	26.0	80	34	20	15	M8	16.99
L1016.RF35-2440	35	2440	26.0	80	34	20	15	M8	17.57
L1016.RF35-2520	35	2520	26.0	80	34	20	15	M8	18.14
L1016.RF35-2600	35	2600	26.0	80	34	20	15	M8	18.72
L1016.RF35-2680	35	2680	26.0	80	34	20	15	M8	19.30



Order No.	Rail size	l_1	h_1	l_2	w_1	l_3	h_2	d_1	Weight kg
L1016.RF35-2760	35	2760	26.0	80	34	20	15	M8	19.87
L1016.RF35-2840	35	2840	26.0	80	34	20	15	M8	20.45
L1016.RF35-2920	35	2920	26.0	80	34	20	15	M8	21.02
L1016.RF35-3000	35	3000	26.0	80	34	20	15	M8	21.60
L1016.RF35-3080	35	3080	26.0	80	34	20	15	M8	22.18
L1016.RF35-3160	35	3160	26.0	80	34	20	15	M8	22.75
L1016.RF35-3240	35	3240	26.0	80	34	20	15	M8	23.33
L1016.RF35-3320	35	3320	26.0	80	34	20	15	M8	23.90
L1016.RF35-3400	35	3400	26.0	80	34	20	15	M8	24.48
L1016.RF35-3480	35	3480	26.0	80	34	20	15	M8	25.06
L1016.RF35-3560	35	3560	26.0	80	34	20	15	M8	25.63
L1016.RF35-3640	35	3640	26.0	80	34	20	15	M8	26.21
L1016.RF35-3720	35	3720	26.0	80	34	20	15	M8	26.78
L1016.RF35-3800	35	3800	26.0	80	34	20	15	M8	27.36
L1016.RF35-3880	35	3880	26.0	80	34	20	15	M8	27.94
L1016.RF35-3960	35	3960	26.0	80	34	20	15	M8	28.51
L1016.RF35-4000	35	4000	26.0	80	34	20	15	M8	28.80