



45mm Linear Guide Rail


rear fixing

Linear Guide-ways



L1016.RF45

LINEAR GUIDEWAYS

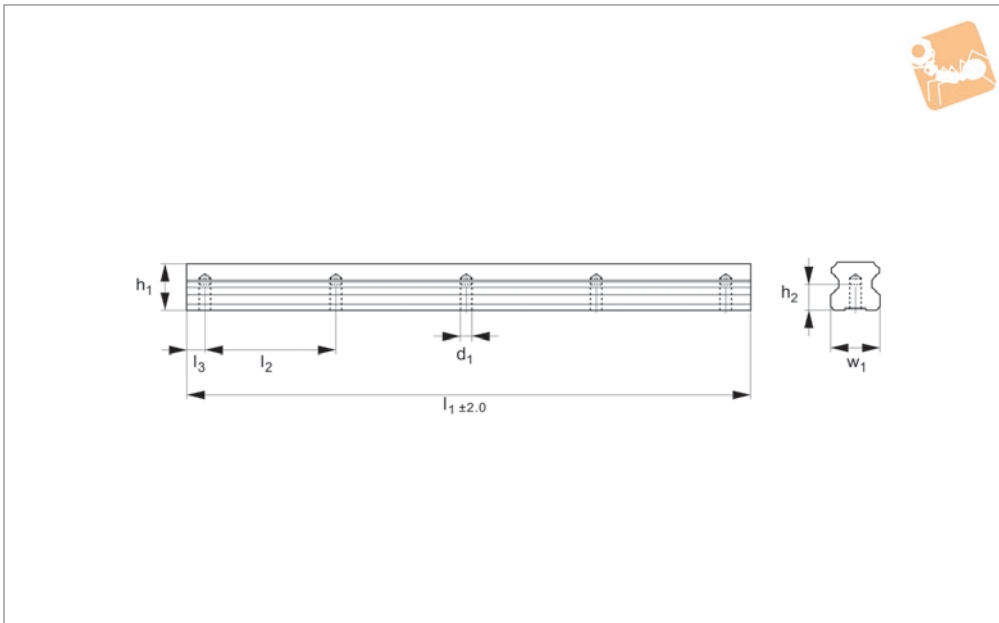

Material

Hardened and ground steel (typically 60 HRC).

Technical Notes

For carriages to suit the required load see

part nos. L1016.F (flanged) and L1016.U (unflanged).

Other rail lengths on request.

Weight: 12,3 Kg/m.

Order No.	Rail size	l_1	h_1	l_2	w_1	l_3	h_2	d_1	Weight kg
L1016.RF45-0255	45	255	31.1	105	45	22.5	24	M12	26.09
L1016.RF45-0360	45	360	31.1	105	45	22.5	24	M12	36.83
L1016.RF45-0465	45	465	31.1	105	45	22.5	24	M12	47.57
L1016.RF45-0570	45	570	31.1	105	45	22.5	24	M12	58.31
L1016.RF45-0675	45	675	31.1	105	45	22.5	24	M12	69.05
L1016.RF45-0780	45	780	31.1	105	45	22.5	24	M12	79.79
L1016.RF45-0885	45	885	31.1	105	45	22.5	24	M12	90.54
L1016.RF45-0990	45	990	31.1	105	45	22.5	24	M12	101.28
L1016.RF45-1095	45	1095	31.1	105	45	22.5	24	M12	13.47
L1016.RF45-1200	45	1200	31.1	105	45	22.5	24	M12	14.76
L1016.RF45-1305	45	1305	31.1	105	45	22.5	24	M12	16.05
L1016.RF45-1410	45	1410	31.1	105	45	22.5	24	M12	17.34
L1016.RF45-1515	45	1515	31.1	105	45	22.5	24	M12	18.63
L1016.RF45-1620	45	1620	31.1	105	45	22.5	24	M12	19.93
L1016.RF45-1725	45	1725	31.1	105	45	22.5	24	M12	21.22
L1016.RF45-1830	45	1830	31.1	105	45	22.5	24	M12	22.51
L1016.RF45-1935	45	1935	31.1	105	45	22.5	24	M12	23.80
L1016.RF45-2040	45	2040	31.1	105	45	22.5	24	M12	25.09
L1016.RF45-2145	45	2145	31.1	105	45	22.5	24	M12	26.38
L1016.RF45-2250	45	2250	31.1	105	45	22.5	24	M12	27.68
L1016.RF45-2355	45	2355	31.1	105	45	22.5	24	M12	28.97
L1016.RF45-2460	45	2460	31.1	105	45	22.5	24	M12	30.26
L1016.RF45-2565	45	2565	31.1	105	45	22.5	24	M12	31.55
L1016.RF45-2670	45	2670	31.1	105	45	22.5	24	M12	32.84
L1016.RF45-2775	45	2775	31.1	105	45	22.5	24	M12	34.13
L1016.RF45-2880	45	2880	31.1	105	45	22.5	24	M12	35.42
L1016.RF45-2985	45	2985	31.1	105	45	22.5	24	M12	36.72
L1016.RF45-3090	45	3090	31.1	105	45	22.5	24	M12	38.01
L1016.RF45-3195	45	3195	31.1	105	45	22.5	24	M12	39.30
L1016.RF45-3300	45	3300	31.1	105	45	22.5	24	M12	40.59
L1016.RF45-3405	45	3405	31.1	105	45	22.5	24	M12	41.88
L1016.RF45-3510	45	3510	31.1	105	45	22.5	24	M12	43.17



Order No.	Rail size	l_1	h_1	l_2	w_1	l_3	h_2	d_1	Weight kg
L1016.RF45-3615	45	3615	31.1	105	45	22.5	24	M12	44.46
L1016.RF45-3720	45	3720	31.1	105	45	22.5	24	M12	45.76
L1016.RF45-3825	45	3825	31.1	105	45	22.5	24	M12	47.05
L1016.RF45-3930	45	3930	31.1	105	45	22.5	24	M12	48.34
L1016.RF45-4000	45	4000	31.1	105	45	22.5	24	M12	49.20