



15mm Aluminium Linear Guide Rail


rear fixing with stainless raceways

Linear Guide-ways



L1018.15R

LINEAR GUIDEWAYS

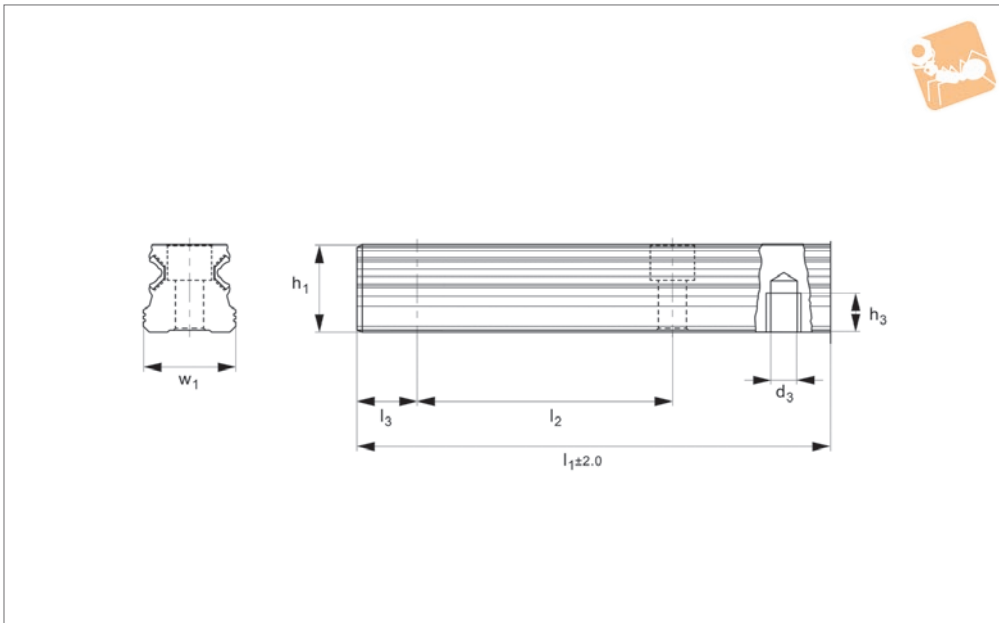

Material

Aluminium profile (AlMgSi0.5, anodized 12-15µ). Raceway stainless steel (X46Cr13), hardened to 58-62HRC.

versus steel versions. The aluminium rails are made of high quality aluminium alloy with hardened stainless steel raceway.

weight aluminium carriages. For standard steel linear guideways and carriages see part no. L1016.

Technical Notes

Compact, light-weight design. 60% saving

Tips

These are very lightweight aluminium rails and can only be used with our light-

Order No.	Rail size	l ₁	w ₁	h ₁	d ₃	h ₃	l ₂	l ₃	Weight kg
L1018.15-0180-R	15	180	15	14.3	M5	7	60	28	0.1
L1018.15-0240-R	15	240	15	14.3	M5	7	60	28	0.1
L1018.15-0300-R	15	300	15	14.3	M5	7	60	28	0.2
L1018.15-0360-R	15	360	15	14.3	M5	7	60	28	0.2
L1018.15-0420-R	15	420	15	14.3	M5	7	60	28	0.2
L1018.15-0480-R	15	480	15	14.3	M5	7	60	28	0.3
L1018.15-0540-R	15	540	15	14.3	M5	7	60	28	0.3
L1018.15-0600-R	15	600	15	14.3	M5	7	60	28	0.3
L1018.15-0660-R	15	660	15	14.3	M5	7	60	28	0.4
L1018.15-0720-R	15	720	15	14.3	M5	7	60	28	0.4
L1018.15-0780-R	15	780	15	14.3	M5	7	60	28	0.4
L1018.15-0840-R	15	840	15	14.3	M5	7	60	28	0.5
L1018.15-0900-R	15	900	15	14.3	M5	7	60	28	0.5
L1018.15-0960-R	15	960	15	14.3	M5	7	60	28	0.5
L1018.15-1020-R	15	1020	15	14.3	M5	7	60	28	0.6
L1018.15-1080-R	15	1080	15	14.3	M5	7	60	28	0.6
L1018.15-1140-R	15	1140	15	14.3	M5	7	60	28	0.6
L1018.15-1200-R	15	1200	15	14.3	M5	7	60	28	0.7
L1018.15-1260-R	15	1260	15	14.3	M5	7	60	28	0.7
L1018.15-1320-R	15	1320	15	14.3	M5	7	60	28	0.8
L1018.15-1380-R	15	1380	15	14.3	M5	7	60	28	0.8
L1018.15-1440-R	15	1440	15	14.3	M5	7	60	28	0.8
L1018.15-1500-R	15	1500	15	14.3	M5	7	60	28	0.9
L1018.15-1560-R	15	1560	15	14.3	M5	7	60	28	0.9
L1018.15-1620-R	15	1620	15	14.3	M5	7	60	28	0.9
L1018.15-1680-R	15	1680	15	14.3	M5	7	60	28	1.0
L1018.15-1740-R	15	1740	15	14.3	M5	7	60	28	1.0
L1018.15-1800-R	15	1800	15	14.3	M5	7	60	28	1.0
L1018.15-1860-R	15	1860	15	14.3	M5	7	60	28	1.1
L1018.15-1940-R	15	1940	15	14.3	M5	7	60	28	1.1
L1018.15-1980-R	15	1980	15	14.3	M5	7	60	28	1.1



Order No.	Rail size	l_1	w_1	h_1	d_3	h_3	l_2	l_3	Weight kg
L1018.15-2040-R	15	2040	15	14.3	M5	7	60	28	1.2
L1018.15-2100-R	15	2100	15	14.3	M5	7	60	28	1.2
L1018.15-2160-R	15	2160	15	14.3	M5	7	60	28	1.2
L1018.15-2220-R	15	2220	15	14.3	M5	7	60	28	1.3
L1018.15-2280-R	15	2280	15	14.3	M5	7	60	28	1.3
L1018.15-2340-R	15	2340	15	14.3	M5	7	60	28	1.3
L1018.15-2400-R	15	2400	15	14.3	M5	7	60	28	1.4
L1018.15-2460-R	15	2460	15	14.3	M5	7	60	28	1.4
L1018.15-2520-R	15	2520	15	14.3	M5	7	60	28	1.4
L1018.15-2580-R	15	2580	15	14.3	M5	7	60	28	1.5
L1018.15-2640-R	15	2640	15	14.3	M5	7	60	28	1.5
L1018.15-2700-R	15	2700	15	14.3	M5	7	60	28	1.5
L1018.15-2760-R	15	2760	15	14.3	M5	7	60	28	1.6
L1018.15-2820-R	15	2820	15	14.3	M5	7	60	28	1.6
L1018.15-2880-R	15	2880	15	14.3	M5	7	60	28	1.6
L1018.15-2940-R	15	2940	15	14.3	M5	7	60	28	1.7
L1018.15-3000-R	15	3000	15	14.3	M5	7	60	28	1.7
L1018.15-3060-R	15	3060	15	14.3	M5	7	60	28	1.7
L1018.15-3120-R	15	3120	15	14.3	M5	7	60	28	1.8
L1018.15-3180-R	15	3180	15	14.3	M5	7	60	28	1.8
L1018.15-3240-R	15	3240	15	14.3	M5	7	60	28	1.8
L1018.15-3300-R	15	3300	15	14.3	M5	7	60	28	1.9
L1018.15-3360-R	15	3360	15	14.3	M5	7	60	28	1.9
L1018.15-3420-R	15	3420	15	14.3	M5	7	60	28	1.9
L1018.15-3480-R	15	3480	15	14.3	M5	7	60	28	2.0
L1018.15-3540-R	15	3540	15	14.3	M5	7	60	28	2.0
L1018.15-3600-R	15	3600	15	14.3	M5	7	60	28	2.1
L1018.15-3660-R	15	3660	15	14.3	M5	7	60	28	2.1
L1018.15-3720-R	15	3720	15	14.3	M5	7	60	28	2.1
L1018.15-3780-R	15	3780	15	14.3	M5	7	60	28	2.2
L1018.15-3840-R	15	3840	15	14.3	M5	7	60	28	2.2
L1018.15-3900-R	15	3900	15	14.3	M5	7	60	28	2.2
L1018.15-3960-R	15	3960	15	14.3	M5	7	60	28	2.3
L1018.15-4000-R	15	4000	15	14.3	M5	7	60	28	2.3

Ordering Example

