




Actuator

0,366" bore

Cylinders

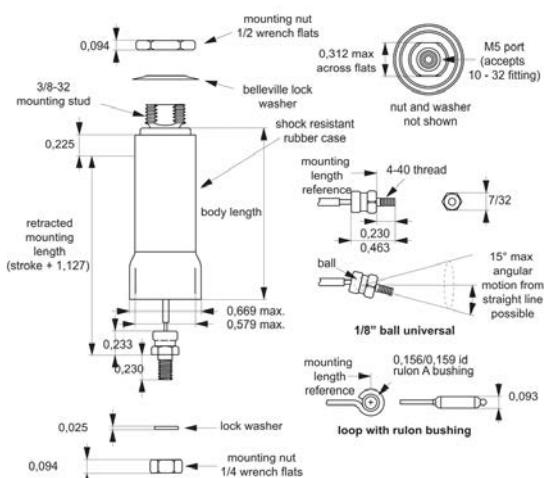

L4592

CYLINDERS

Material

Graphite carbon piston.
Annealed borosilicate glass cylinder.
Precision fire-polished bore.
Stainless steel piston rod (AISI 304).
Shock resistant rubber case.

Technical Notes

Piston area = 0.701 in² (452.25mm²)
Pressure range = full vacuum - 100 psi
(0.69 MPa)
Force factor:
Piston area x pressure = output force.

Max force = 46.83N (at 0.69 MPa)

Minimum pressure differential required for actuation = 0.05 psi (345 Pa)

Friction coefficient = 0.2

Force without side load typically 0.5% - 1.5% of load.

Operating temperature range: -55 °C to 150 °C.

If operating at temperatures about +70 °C, please advise when placing order.

Mounting data:

Mounting hole:

Round 0.375" (10mm)

Suggested mounting bracket thickness = 0.060" - 0.125" (1.52mm - 3.18mm).

Mounting nut torque:

Head = 4-8 in-lb (0.45-0.90 Nm).

Rod end = 2-5 in-lb (0.23-0.56 Nm).

Fitting = 12 in-lb max

*Full stroke is obtained with customer held mounting tolerance of ±0.015" (0.038mm).

Order No.	Stroke	Rod end linkage	Bore dia.	Leak at 50 psi max.	Leak at 100 psi max.	Body length
L4592.A0500	0,5"	1/8" Ball	0,366"	0.36	1.17	1,092"
L4592.A1000	1,0"	1/8" Ball	0,366"	0.36	1.17	1,492"
L4592.A1500	1,5"	1/8" Ball	0,366"	0.36	1.17	2,092"
L4592.A2000	2,0"	1/8" Ball	0,366"	0.36	1.17	2,492"
L4592.A3000	3,0"	1/8" Ball	0,366"	0.36	1.17	3,492"
L4592.A4000	4,0"	1/8" Ball	0,366"	0.36	1.17	4,492"
L4592.B0500	0,5"	Loop	0,366"	0.36	1.17	1,092
L4592.B1000	1,0"	Loop	0,366"	0.36	1.17	1,592"
L4592.B1500	1,5"	Loop	0,366"	0.36	1.17	2,092"
L4592.B2000	2,0"	Loop	0,366"	0.36	1.17	2,592"
L4592.B3000	3,0"	Loop	0,366"	0.36	1.17	3,592"
L4592.B4000	4,0"	Loop	0,366"	0.36	1.17	4,592"