




# Captive Screws - Cheese Head slot drive - 316 stainless, blackened



Captive Screws

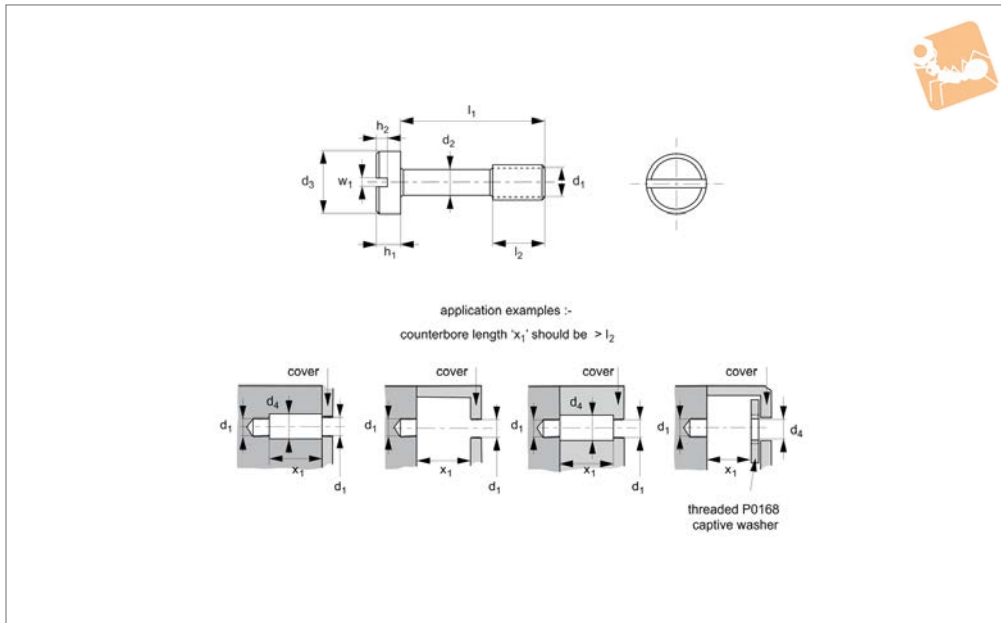

**P0155.B4**

MADE IN BRITAIN

CAPTIVE SCREWS

### Material

Stainless steel (AISI 316, 1.440), black oxide coating. Tensile strength 480 N/mm<sup>2</sup>. Proof stress min. 200 N/mm<sup>2</sup>, austenitic stainless steel.

Also available on request in steel (anodised, black oxide or zinc plated) stainless steel (AISI 303, 1.4305), brass, aluminium etc.

### Technical Notes

Used to comply with the Machinery Direc-

tive 2006/42/EC. Generally to ISO 1207. Often used with our captive washers (P0168) or retaining flanges (P0169 - for sheet metal applications). The use of our captive washers should be considered when fitted in panels with unthreaded holes.

### Tips

Other head drive styles - add suffix:  
-TX for Torx (hexalobular).  
-PZ for Pozidrive.

-SE for snake-eye security.

### Important Notes

Please note that these screws have a reduced diameter shank and should not be tightened to the recommended torque for an equivalent machine screw of size d<sub>1</sub>.

Order No.	d <sub>1</sub>	l <sub>1</sub> ±0.25	d <sub>2</sub> ±0.12	l <sub>2</sub> ±0.25	d <sub>3</sub>	d <sub>4</sub> min.	h <sub>1</sub>	h <sub>2</sub>	w <sub>1</sub>
P0155.020-010-B4	M 2	10	1.2	3.0	3.8	2.5	1.3	0.85	0.5
P0155.020-012-B4	M 2	12	1.2	3.0	3.8	2.5	1.3	0.85	0.5
P0155.020-016-B4	M 2	16	1.2	3.0	3.8	2.5	1.3	0.85	0.5
P0155.020-020-B4	M 2	20	1.2	3.0	3.8	2.5	1.3	0.85	0.5
P0155.025-010-B4	M 2,5	10	1.7	3.7	4.5	2.8	1.6	1.00	0.6
P0155.025-012-B4	M 2,5	12	1.7	3.7	4.5	2.8	1.6	1.00	0.6
P0155.025-016-B4	M 2,5	16	1.7	3.7	4.5	2.8	1.6	1.00	0.6
P0155.025-020-B4	M 2,5	20	1.7	3.7	4.5	2.8	1.6	1.00	0.6
P0155.025-025-B4	M 2,5	25	1.7	3.7	4.5	2.8	1.6	1.00	0.6
P0155.025-030-B4	M 2,5	30	1.7	3.7	4.5	2.8	1.6	1.00	0.6
P0155.030-006-B4	M 3	6	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-008-B4	M 3	8	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-010-B4	M 3	10	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-011-B4	M 3	11	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-013-B4	M 3	13	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-016-B4	M 3	16	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-018-B4	M 3	18	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-020-B4	M 3	20	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-025-B4	M 3	25	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-030-B4	M 3	30	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.030-040-B4	M 3	40	2.0	4.5	5.5	3.5	2.0	1.30	0.8
P0155.035-010-B4	M3,5	10	2.3	5.2	6.0	3.8	2.4	1.4	1.0
P0155.035-016-B4	M3,5	16	2.3	5.2	6.0	3.8	2.4	1.4	1.0
P0155.035-020-B4	M3,5	20	2.3	5.2	6.0	3.8	2.4	1.4	1.0
P0155.035-025-B4	M3,5	25	2.3	5.2	6.0	3.8	2.4	1.4	1.0



CAPTIVE SCREWS

Order No.	d <sub>1</sub>	l <sub>1</sub> ±0.25	d <sub>2</sub> ±0.12	l <sub>2</sub> ±0.25	d <sub>3</sub>	d <sub>4</sub> min.	h <sub>1</sub>	h <sub>2</sub>	w <sub>1</sub>
P0155.035-030-B4	M3,5	30	2.3	5.2	6.0	3.8	2.4	1.4	1.0
P0155.035-040-B4	M3,5	40	2.3	5.2	6.0	3.8	2.4	1.4	1.0
P0155.040-010-B4	M 4	10	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-012-B4	M 4	12	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-016-B4	M 4	16	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-018-B4	M 4	18	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-019-B4	M 4	19	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-020-B4	M 4	20	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-025-B4	M 4	25	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-030-B4	M 4	30	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-040-B4	M 4	40	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-050-B4	M 4	50	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.040-060-B4	M 4	60	2.8	6.0	7.0	4.5	2.6	1.6	1.2
P0155.050-010-B4	M 5	10	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-012-B4	M 5	12	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-016-B4	M 5	16	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-018-B4	M 5	18	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-020-B4	M 5	20	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-022-B4	M 5	22	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-025-B4	M 5	25	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-030-B4	M 5	30	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-040-B4	M 5	40	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-050-B4	M 5	50	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-060-B4	M 5	60	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.050-080-B4	M 5	80	3.7	7.5	8.5	5.5	3.3	2.0	1.2
P0155.060-010-B4	M 6	10	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-012-B4	M 6	12	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-016-B4	M 6	16	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-020-B4	M 6	20	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-025-B4	M 6	25	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-030-B4	M 6	30	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-040-B4	M 6	40	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-050-B4	M 6	50	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-060-B4	M 6	60	4.2	7.5	10.0	6.5	3.9	2.3	1.6
P0155.060-080-B4	M 6	80	4.2	7.5	10.0	6.5	3.9	2.3	1.6