



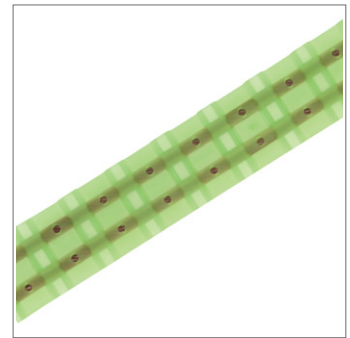

Timing Belts-12,7mm circular pitch

19,4mm wide

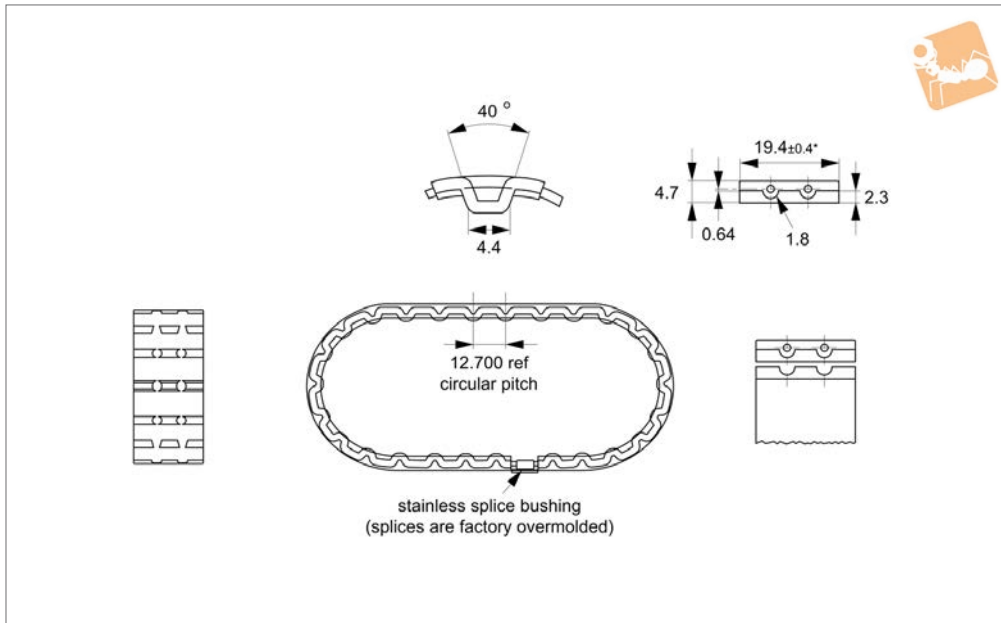

R1420

CHAINS, BELTS & PULLEYS

Material

Polyurethane (green) 90A durometer, Ø1,6mm stainless steel cable. Fibre cable core (aramid) also available (particularly suitable for reverse bend applications).

Technical Notes

No flanges required, infinite lengths, silent

drive, no-walk feature, Compact design, positive drive, light weight, extra strong, no lubrication Weight: 84 grams/metre. Ultimate tensile strength 1335N. Temperature range +83°C to -54°C. Recommended max. operating speed 1,91m/s.

* Splices are factory overmoulded.

Tips

Field splice kit available (50TB-7).

Important Notes

Operates with R1421 pulleys.

Order No.	No. of pitches	Length ref.
R1420.032	32	406.4
R1420.036	36	457.2
R1420.040	40	508.0
R1420.044	44	558.8
R1420.048	48	609.6
R1420.050	50	635.0
R1420.054	54	685.8
R1420.056	56	711.0
R1420.060	60	762.0
R1420.064	64	812.8
R1420.066	66	838.2
R1420.070	70	889.0
R1420.072	72	914.4
R1420.075	75	952.5
R1420.078	78	990.6
R1420.080	80	1016.0
R1420.084	84	1066.8
R1420.088	88	1117.6
R1420.090	90	1143.0
R1420.096	96	1219.6
R1420.102	102	1295.4
R1420.108	108	1371.6
R1420.114	114	1447.8
R1420.120	120	1524.0
R1420.126	126	1600.2
R1420.132	132	1676.4
R1420.140	140	1778.0
R1420.150	150	1905.0
R1420.160	160	2032.0



Order No.	No. of pitches	Length ref.
R1420.170	170	2159.0
R1420.180	180	2286.0
R1420.190	190	2413.0
R1420.200	200	2540.0
R1420.225	225	2857.5
R1420.250	250	3175.0
R1420.275	275	3492.5
R1420.400	400	5080.0
R1420-1.5M	-	1,5 metres not spliced
R1420-3.0M	-	3,0 metres not spliced
R1420-7.5M	-	7,5 metres not spliced
R1420-15.0M	-	15,0 metres not spliced
R1420-30.0M	-	30,0 metres not spliced