




# Double Disk Coupling - Aluminium

clamp fixing, long type.

## Flexible Couplings

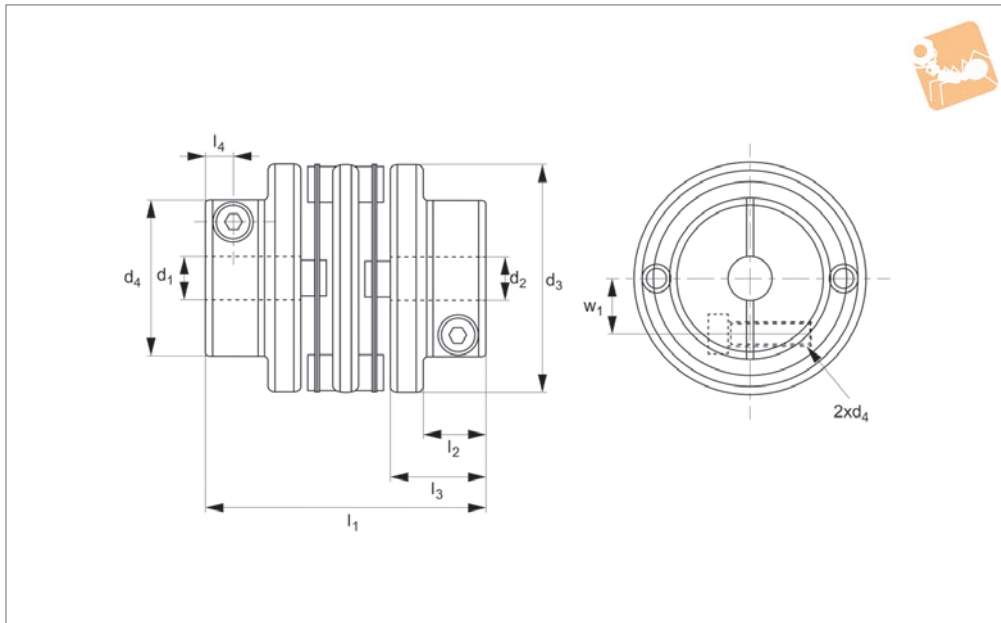

**R3068**

FLEXIBLE COUPLINGS

**Material**

Main frame: Anodized aluminium AL 7075  
 Disk: Stainless steel SUS301.  
 Pin: Stainless steel SUS303.

**Technical Notes**

High wrench torque load, high wrench torque rigidity capacity and excellent

sensibility.

Dual stainless steel rings to correct radial, angular and axial deviation.  
 Clockwise character is exactly the same as anti-clockwise one.

Free maintenance, oil resist and anti-corrosiveness, zero backlash.

Offset of angular, parallel, or axial deviation are individual allowed, so couple reasons of axial offset appearing at same time would reduce the unit allowable value.

Order No.	d <sub>1</sub> & d <sub>2</sub> tol. h8	d <sub>3</sub>	d <sub>4</sub>	d <sub>5</sub>	l <sub>1</sub>	l <sub>2</sub>	l <sub>3</sub>	l <sub>4</sub>	w	Clamping screw lock torque Nm
R3068.A-22-6	6	32	22	M3	40	13.7	9	4	8	1.5
R3068.A-22-7	7	32	22	M3	40	13.7	9	4	8	1.5
R3068.A-22-8	8	32	22	M3	40	13.7	9	4	8	1.5
R3068.A-22-10	10	32	22	M3	40	13.7	9	4	8	1.5
R3068.B-28-7	7	40	28	M4	46	16.5	12	6	10.5	2.5
R3068.B-28-8	8	40	28	M4	46	16.5	12	6	10.5	2.5
R3068.B-28-10	10	40	28	M4	46	16.5	12	6	10.5	2.5
R3068.B-28-11	11	40	28	M4	46	16.5	12	6	10.5	2.5
R3068.B-28-12	12	40	28	M4	46	16.5	12	6	10.5	2.5
R3068.B-28-14	14	40	28	M4	46	16.5	12	6	10.5	2.5
R3068.C-39-12	12	50	39	M5	52	19.4	15	7	14.8	7
R3068.C-39-14	14	50	39	M5	52	19.4	15	7	14.8	7
R3068.C-39-15	15	50	39	M5	52	19.4	15	7	14.8	7
R3068.C-39-16	16	50	39	M5	52	19.4	15	7	14.8	7
R3068.C-39-18	18	50	39	M5	52	19.4	15	7	14.8	7
R3068.C-39-19	19	50	39	M5	52	19.4	15	7	14.8	7
R3068.C-39-20	20	50	39	M5	52	19.4	15	7	14.8	7
R3068.D-45-15	15	63	45	M6	58	22.3	18	8	17	12
R3068.D-45-16	16	63	45	M6	58	22.3	18	8	17	12
R3068.D-45-18	18	63	45	M6	58	22.3	18	8	17	12
R3068.D-45-19	19	63	45	M6	58	22.3	18	8	17	12
R3068.D-45-20	20	63	45	M6	58	22.3	18	8	17	12
R3068.D-45-25	25	63	45	M6	58	22.3	18	8	17	12