




Captive Screws - Button Head

hex drive - titanium

Captive Screws

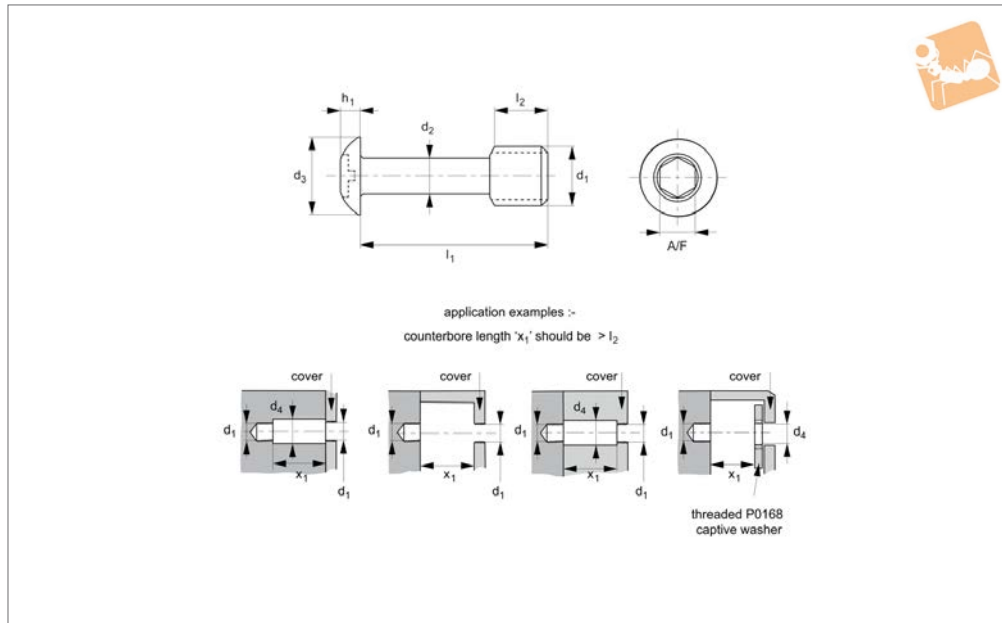

P0151.Ti

CAPTIVE SCREWS

Material

Titanium grade 2 (tensile strength 345 N/mm²), or grade 5 (tensile strength 900 N/mm²).

Also available on request in steel (anodised, black oxide or zinc plated) stainless steel (AISI 316, 1.440 or AISI 303, 1.4305), brass, aluminium etc.

Technical Notes

Used to comply with the Machinery Direc-

tive 2006/42/EC. Generally to ISO 7380-1. Often used with our captive washers (P0168) or retaining flanges (P0169 - for sheet metal applications). The use of our captive washers should be considered when fitted in panels with unthreaded holes.

T5 also available on request.

Replace -T2 with -T5 at the end of part number.

Important Notes

Please note that these screws have a reduced diameter shank and should not be tightened to the recommended torque for an equivalent machine screw of size d₁.

Order No.	d ₁	l ₁ ±0.25	d ₂ ±0.12	l ₂ ±0.25	d ₃ max.	d ₄ min.	h ₁ max.	A/F	Material
P0151.025-008-T2	M 2,5	8	1.7	3.7	4.5	2.8	1.50	1.5	Grade 2
P0151.025-010-T2	M 2,5	10	1.7	3.7	4.5	2.8	1.50	1.5	Grade 2
P0151.025-012-T2	M 2,5	12	1.7	3.7	4.5	2.8	1.50	1.5	Grade 2
P0151.025-016-T2	M 2,5	16	1.7	3.7	4.5	2.8	1.50	1.5	Grade 2
P0151.025-020-T2	M 2,5	20	1.7	3.7	4.5	2.8	1.50	1.5	Grade 2
P0151.030-008-T2	M 3	8	2.0	4.5	5.7	3.5	1.53	2	Grade 2
P0151.030-010-T2	M 3	10	2.0	4.5	5.7	3.5	1.53	2	Grade 2
P0151.030-016-T2	M 3	16	2.0	4.5	5.7	3.5	1.53	2	Grade 2
P0151.030-020-T2	M 3	20	2.0	4.5	5.7	3.5	1.53	2	Grade 2
P0151.030-025-T2	M 3	25	2.0	4.5	5.7	3.5	1.53	2	Grade 2
P0151.030-030-T2	M 3	30	2.0	4.5	5.7	3.5	1.53	2	Grade 2
P0151.030-040-T2	M 3	40	2.0	4.5	5.7	3.5	1.53	2	Grade 2
P0151.040-010-T2	M 4	10	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-012-T2	M 4	12	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-016-T2	M 4	16	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-020-T2	M 4	20	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-025-T2	M 4	25	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-030-T2	M 4	30	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-035-T2	M 4	35	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-040-T2	M 4	40	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-050-T2	M 4	50	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.040-060-T2	M 4	60	2.8	6.0	7.6	4.5	2.10	2.5	Grade 2
P0151.050-012-T2	M 5	12	3.7	7.5	9.5	5.5	2.63	3	Grade 2
P0151.050-016-T2	M 5	16	3.7	7.5	9.5	5.5	2.63	3	Grade 2
P0151.050-020-T2	M 5	20	3.7	7.5	9.5	5.5	2.63	3	Grade 2
P0151.050-025-T2	M 5	25	3.7	7.5	9.5	5.5	2.63	3	Grade 2



CAPTIVE SCREWS

Order No.	d ₁	l ₁ ±0.25	d ₂ ±0.12	l ₂ ±0.25	d ₃ max.	d ₄ min.	h ₁ max.	A/F	Material
P0151.050-030-T2	M 5	30	3.7	7.5	9.5	5.5	2.63	3	Grade 2
P0151.050-040-T2	M 5	40	3.7	7.5	9.5	5.5	2.63	3	Grade 2
P0151.050-050-T2	M 5	50	3.7	7.5	9.5	5.5	2.63	3	Grade 2
P0151.050-060-T2	M 5	60	3.7	7.5	9.5	5.5	2.63	3	Grade 2
P0151.060-012-T2	M 6	12	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-016-T2	M 6	16	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-020-T2	M 6	20	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-025-T2	M 6	25	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-030-T2	M 6	30	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-035-T2	M 6	35	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-040-T2	M 6	40	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-050-T2	M 6	50	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-060-T2	M 6	60	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.060-080-T2	M 6	80	4.2	7.5	10.5	6.5	3.10	4	Grade 2
P0151.080-016-T2	M 8	16	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-020-T2	M 8	20	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-025-T2	M 8	25	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-030-T2	M 8	30	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-035-T2	M 8	35	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-040-T2	M 8	40	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-045-T2	M 8	45	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-050-T2	M 8	50	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-060-T2	M 8	60	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.080-080-T2	M 8	80	6.0	10.0	14.0	8.5	4.46	5	Grade 2
P0151.100-020-T2	M 10	20	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.100-025-T2	M 10	25	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.100-030-T2	M 10	30	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.100-035-T2	M 10	35	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.100-040-T2	M 10	40	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.100-045-T2	M 10	45	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.100-050-T2	M 10	50	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.100-060-T2	M 10	60	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.100-080-T2	M 10	80	7.5	12.5	17.5	10.6	5.5	6	Grade 2
P0151.025-008-T5	M 2,5	8	1.7	3.7	4.5	2.8	1.50	1.5	Grade 5
P0151.025-010-T5	M 2,5	10	1.7	3.7	4.5	2.8	1.50	1.5	Grade 5
P0151.025-012-T5	M 2,5	12	1.7	3.7	4.5	2.8	1.50	1.5	Grade 5
P0151.025-016-T5	M 2,5	16	1.7	3.7	4.5	2.8	1.50	1.5	Grade 5
P0151.025-020-T5	M 2,5	20	1.7	3.7	4.5	2.8	1.50	1.5	Grade 5
P0151.030-008-T5	M 3	8	2.0	4.5	5.7	3.5	1.53	2	Grade 5
P0151.030-010-T5	M 3	10	2.0	4.5	5.7	3.5	1.53	2	Grade 5
P0151.030-016-T5	M 3	16	2.0	4.5	5.7	3.5	1.53	2	Grade 5
P0151.030-020-T5	M 3	20	2.0	4.5	5.7	3.5	1.53	2	Grade 5
P0151.030-025-T5	M 3	25	2.0	4.5	5.7	3.5	1.53	2	Grade 5
P0151.030-030-T5	M 3	30	2.0	4.5	5.7	3.5	1.53	2	Grade 5
P0151.030-040-T5	M 3	40	2.0	4.5	5.7	3.5	1.53	2	Grade 5
P0151.040-010-T5	M 4	10	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-012-T5	M 4	12	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-016-T5	M 4	16	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-020-T5	M 4	20	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-025-T5	M 4	25	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-030-T5	M 4	30	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-035-T5	M 4	35	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-040-T5	M 4	40	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-050-T5	M 4	50	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.040-060-T5	M 4	60	2.8	6.0	7.6	4.5	2.10	2.5	Grade 5
P0151.050-012-T5	M 5	12	3.7	7.5	9.5	5.5	2.63	3	Grade 5
P0151.050-016-T5	M 5	16	3.7	7.5	9.5	5.5	2.63	3	Grade 5
P0151.050-020-T5	M 5	20	3.7	7.5	9.5	5.5	2.63	3	Grade 5
P0151.050-025-T5	M 5	25	3.7	7.5	9.5	5.5	2.63	3	Grade 5
P0151.050-030-T5	M 5	30	3.7	7.5	9.5	5.5	2.63	3	Grade 5
P0151.050-040-T5	M 5	40	3.7	7.5	9.5	5.5	2.63	3	Grade 5
P0151.050-050-T5	M 5	50	3.7	7.5	9.5	5.5	2.63	3	Grade 5
P0151.050-060-T5	M 5	60	3.7	7.5	9.5	5.5	2.63	3	Grade 5
P0151.060-012-T5	M 6	12	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.060-016-T5	M 6	16	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.060-020-T5	M 6	20	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.060-025-T5	M 6	25	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.060-030-T5	M 6	30	4.2	7.5	10.5	6.5	3.10	4	Grade 5



Captive Screws - Button Head

hex drive - titanium

Captive Screws



Order No.	d ₁	l ₁ ±0.25	d ₂ ±0.12	l ₂ ±0.25	d ₃ max.	d ₄ min.	h ₁ max.	A/F	Material
P0151.060-035-T5	M 6	35	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.060-040-T5	M 6	40	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.060-050-T5	M 6	50	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.060-060-T5	M 6	60	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.060-080-T5	M 6	80	4.2	7.5	10.5	6.5	3.10	4	Grade 5
P0151.080-016-T5	M 8	16	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-020-T5	M 8	20	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-025-T5	M 8	25	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-030-T5	M 8	30	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-035-T5	M 8	35	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-040-T5	M 8	40	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-045-T5	M 8	45	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-050-T5	M 8	50	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-060-T5	M 8	60	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.080-080-T5	M 8	80	6.0	10.0	14.0	8.5	4.46	5	Grade 5
P0151.100-020-T5	M 10	20	7.5	12.5	17.5	10.6	5.5	6	Grade 5
P0151.100-025-T5	M 10	25	7.5	12.5	17.5	10.6	5.5	6	Grade 5
P0151.100-030-T5	M 10	30	7.5	12.5	17.5	10.6	5.5	6	Grade 5
P0151.100-035-T5	M 10	35	7.5	12.5	17.5	10.6	5.5	6	Grade 5
P0151.100-040-T5	M 10	40	7.5	12.5	17.5	10.6	5.5	6	Grade 5
P0151.100-045-T5	M 10	45	7.5	12.5	17.5	10.6	5.5	6	Grade 5
P0151.100-050-T5	M 10	50	7.5	12.5	17.5	10.6	5.5	6	Grade 5
P0151.100-060-T5	M 10	60	7.5	12.5	17.5	10.6	5.5	6	Grade 5
P0151.100-080-T5	M 10	80	7.5	12.5	17.5	10.6	5.5	6	Grade 5

CAPTIVE SCREWS